

Research Article

A Rectangular Mixed Finite Element Method with a Continuous Flux for an Elliptic Equation Modelling Darcy Flow

Xindong Li and Hongxing Rui

School of Mathematics, Shandong University, Jinan 250100, China

Correspondence should be addressed to Hongxing Rui; hxrui@sdu.edu.cn

Received 26 March 2013; Accepted 29 May 2013

Academic Editor: Santanu Saha Ray

Copyright © 2013 X. Li and H. Rui. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

We introduce a mixed finite element method for an elliptic equation modelling Darcy flow in porous media. We use a staggered mesh where the two components of the velocity and the pressure are defined on three different sets of grid nodes. In the present mixed finite element, the approximate velocity is continuous and the conservation law still holds locally. The LBB consistent condition is established, while the L_2 error estimates are obtained for both the velocity and the pressure. Numerical examples are presented to confirm the theoretical analysis.

1. Introduction

We consider the discretization technique for the elliptic problem modelling the flow in saturated porous media, or the classical Darcy flow problem, including a system of mass conservation law and Darcy's law [1, 2]. The most popular numerical methods for this elliptic equation focus on mixed finite element methods, since by this kind of methods the original scalar variable, called pressure, and its vector flux, named Darcy velocity, can be approximated simultaneously and maintain the local conservation. The classical theory for the mixed finite element, which includes the LBB consistent condition, the existence and uniqueness of the approximate solution, and the error estimate, has been established. Some mixed finite element methods such as RT mixed finite element and BDM mixed finite element are introduced (as in [3–6]), which satisfy the consistent condition and have optimal order error estimate [7, 8]. Give some stabilized mixed finite methods by adding to the classical mixed formulation some least squares residual forms of the governing equations.

By using the abovementioned mixed finite element methods, the approximate velocity is continuous in the normal direction and discontinuous in the tangential direction on the edges of the element. This is reasonable for the case of heterogenous permeability, yet it is desirable that the flux be continuous in some applications [9]. In particular, when

we track the characteristic segment using the approximate velocity, the discontinuities of the velocity may introduce some difficulties when the characteristic line cross the edges of element. While applying mass-conservative characteristic finite element method to the coupled system of compressible miscible displacement in porous media, the continuous flux is crucial [10]. A brief description of this point will be found at the last part of this paper.

To overcome this disadvantage, Arbogast and Wheeler [11] introduced a mixed finite element method with an approximate velocity continuous in both the normal direction and the tangential direction, which was got by adding some freedom to the RT mixed finite element. In this paper, we introduced a mixed finite element method with an approximate velocity continuous in all directions. It is based on rectangular mesh and uses continuous piecewise bilinear functions to approximate the velocity components and uses piecewise constant functions to approximate the pressure. We obtain the element by improving a kind of element for Stokes equation and Navier-Stokes equation given by Han [12], Han and Wu [13], and Han and Yan [14]. By using this mixed finite element, we can get continuous velocity vector and maintain the local conservation. Comparing to the mixed finite element method in [11], we need less degrees of freedom for the same convergence rate. The LBB consistent condition and L_2 error estimates of velocity and pressure are also established.

The outline of the rest of this paper is organized as follows. In Sections 2 and 3, we recall the model problem and weak formulation for the mixed finite element method and then establish the discrete inf-sup consistent condition and L^2 error estimates for the velocity and the pressure in Section 4. In Section 5, we present some numerical examples which verify the efficiency of the proposed mixed finite element method. A valuable application of this method to mass-conservative characteristic (MCC) scheme for the coupled compressible miscible displacement in porous media closes the paper in Section 6.

2. The Mixed Finite Formulation for Darcy Equation

The mathematical model for viscous flow in porous media includes Darcy's law and conservation law of mass, written as follows:

$$\begin{aligned} u &= -\frac{\kappa}{\mu} \nabla p && \text{on } \Omega \text{ (Darcy's law)} \\ \operatorname{div} u &= \phi && \text{on } \Omega \text{ (mass conservation)} \\ u \cdot n &= 0 && \text{on } \Gamma, \end{aligned} \quad (1)$$

where $\kappa > 0$ is the permeability, $\mu > 0$ is the viscosity, and ϕ is the volumetric flow rate source or sink. Γ is the boundary of Ω , and n is the unit outward normal vector to Γ . The variable $u = (u_1, u_2)$ is the Darcy velocity vector, and p is the pressure. The source ϕ must satisfy the consistency constraint

$$\int_{\Omega} \phi d\Omega = 0. \quad (2)$$

Let $L^2(\Omega)$ be the space of square integrable function in Ω with inner product (\cdot, \cdot) and norm $\|\cdot\|$. We use the notation of the Hilbert space

$$H(\operatorname{div}, \Omega) = \left\{ u \in [L^2(\Omega)]^2; \operatorname{div} u \in L^2(\Omega) \right\}, \quad (3)$$

with norm

$$\|u\|_{H(\operatorname{div}, \Omega)} = \{\|u\|^2 + \|\operatorname{div} u\|^2\}^{1/2}. \quad (4)$$

Define the following subspaces of $H(\operatorname{div}, \Omega)$ and $L^2(\Omega)$:

$$V = H_0(\operatorname{div}, \Omega) = \{u \in H(\operatorname{div}, \Omega) : u \cdot n = 0 \text{ on } \Gamma\},$$

$$S = \left\{ q \mid q \in L^2(\Omega) : \int_{\Omega} q d\Omega = 0 \right\}. \quad (5)$$

The classical weak variational formulation of Problem (1) is as follows: find $(u, p) \in V \times S$, such that

$$\begin{aligned} a(u, v) - b(v, p) &= 0 \quad \forall v \in V, \\ b(u, q) &= (\phi, q) \quad \forall q \in S. \end{aligned} \quad (6)$$

Here,

$$a(u, v) = \int_{\Omega} \frac{\mu}{\kappa} u \cdot v dx \quad b(v, q) = \int_{\Omega} q \operatorname{div} v dx. \quad (7)$$

The following discussion and discrete analysis are related to the weak form (6). Let V_0 be a closed subspace of V via

$$V_0 = \{v \in V : b(v, q) = 0, \forall q \in S\}. \quad (8)$$

For the bilinear forms $a(u, v)$ and $b(v, q)$, we have the standard result.

Lemma 1. *The bilinear form $a(u, v)$ is bounded on $V \times V$ and coercive on V_0 , and the bilinear form $b(v, q)$ is bound on $V \times S$. Namely,*

(1) *there exist two constants $C_1 > 0$ and $\alpha > 0$ such that*

$$\begin{aligned} |a(u, v)| &\leq C_1 \|u\|_{H(\operatorname{div}, \Omega)} \|v\|_{H(\operatorname{div}, \Omega)} \quad \forall u, v \in V, \\ a(u, u) &\geq \alpha \|u\|_{H(\operatorname{div}, \Omega)}^2 \quad \forall u \in V_0, \end{aligned} \quad (9)$$

(2) *there is a constant $C_2 > 0$ such that*

$$|b(v, q)| \leq C_2 \|q\|_{0, \Omega} \|v\|_{H(\operatorname{div}, \Omega)} \quad \forall q \in S, v \in V. \quad (10)$$

For the space V and S , the Ladyzhenskaya-Babuška-Brezzi(L-B-B) condition holds; see [15, 16], for example.

Lemma 2. *There is a constant $\beta > 0$ such that*

$$\sup_{v \in V} \frac{b(v, q)}{\|v\|_{H(\operatorname{div}, \Omega)}} \geq \beta \|q\|_{0, \Omega}, \quad \forall q \in S. \quad (11)$$

It is clear that there exists a unique solution $(u, p) \in V \times S$ to the Problem (6).

3. Finite Element Discretization

In this section, we present the mixed finite element based on rectangular mesh for the Darcy flow problem.

In [13], Han and Wu introduced a mixed finite element for Stokes problem and then extended to solve the Navier-Stokes problem [14]. Based on this element, we introduced the new mixed finite element with a continuous flux approximation for Darcy flow problem.

For simplicity, we suppose that the domain Ω is a unit square, and the mixed finite element discussed here can be easily generalized to the case when the domain Ω is a rectangular.

Let N be a given integer and $h = 1/N$. We construct the finite-dimensional subspaces of S and V by introducing three different quadrangulations $\tau_h, \tau_h^1, \tau_h^2$ of Ω .

First, we divide Ω into uniform squares

$$\begin{aligned} T_{i,j} &= \{(x, y) : x_{i-1} \leq x \leq x_i, y_{j-1} \leq y \leq y_j\}, \\ & \quad i, j = 1, \dots, N, \end{aligned} \quad (12)$$

where $x_i = ih$ and $y_j = jh$. The corresponding quadrangulation is denoted by τ_h . See Figure 1(a).

$$\tau_{i,j} = \{T_{i,j} : i, j = 1, \dots, N\}. \quad (13)$$

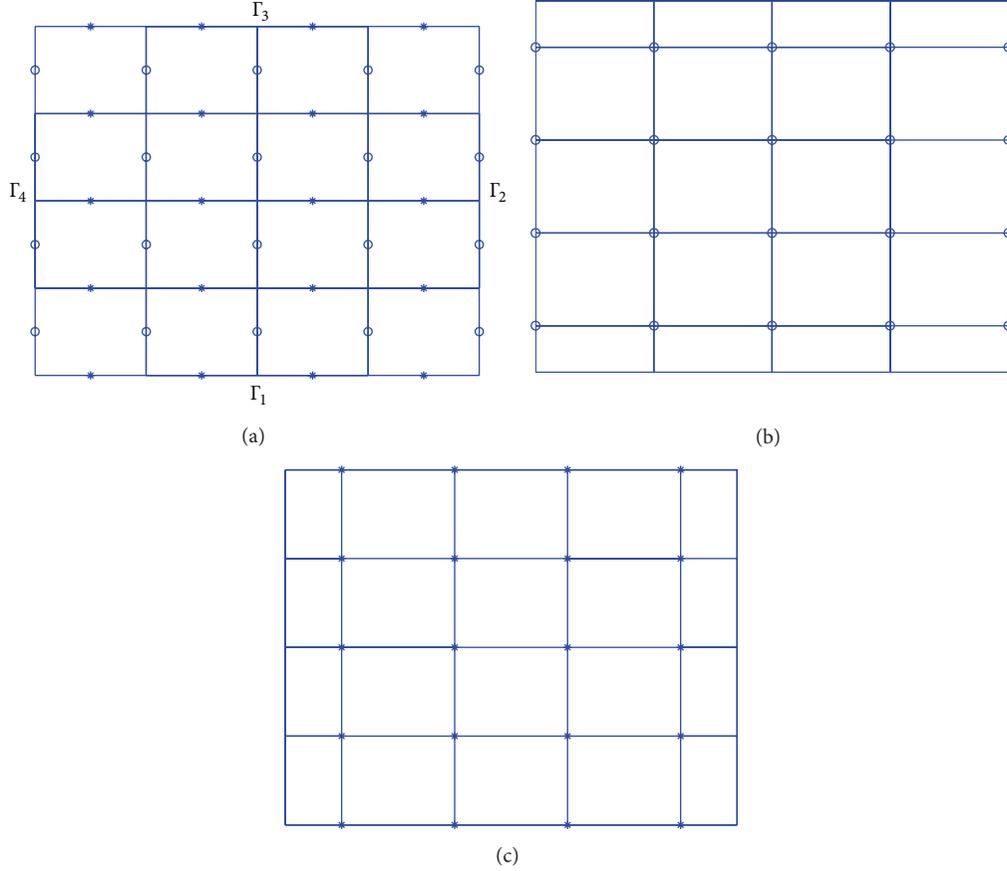


FIGURE 1: Quadrangulations: (a) τ_h , (b) τ_h^1 , and (c) τ_h^2 .

Then, for all $T_{i,j} \in \tau_h$, we connect all the neighbor midpoints of the vertical sides of $T_{i,j}$ by straight segments if the neighbor midpoints have the same vertical coordinate. Then, Ω is divided into squares and rectangles. The corresponding quadrangulation is denoted by τ_h^1 (see Figure 1(b)). Similarly, for all $T_{i,j} \in \tau_h$, we connect all the neighbor midpoints of the horizontal sides of $T_{i,j}$ by straight line segments if the neighbor midpoints have the same horizontal coordinate. Then, we obtained the third quadrangulation of Ω , which is denoted by τ_h^2 (see Figure 1(c)).

Based on the quadrangulation τ_h , we define the piecewise constant functional space used to approximate the pressure

$$S_h := \left\{ q_h : q_h|_T = \text{constant}, \forall T \in \tau_h; \int_{\Omega} q_h dx = 0 \right\}. \tag{14}$$

S_h is a subspace of S .

Furthermore, using the quadrangulations τ_h^1 and τ_h^2 , we construct a subspace of V . Denote by $\Gamma_1, \Gamma_2, \Gamma_3$, and Γ_4 the south, right, north, and left sides on the boundary of Ω . Set

$$\begin{aligned} V_h^1 &= \left\{ v_h \in C^{(0)}(\overline{\Omega}) : v_h|_{T^1} \in Q_{1,1}(T^1) \forall T^1 \in \tau_h^1, \right. \\ &\quad \left. v_h = 0 \text{ on } \Gamma_2 \cup \Gamma_4 \right\}, \\ V_h^2 &= \left\{ v_h \in C^{(0)}(\overline{\Omega}) : v_h|_{T^2} \in Q_{1,1}(T^2) \forall T^2 \in \tau_h^2, \right. \\ &\quad \left. v_h = 0 \text{ on } \Gamma_1 \cup \Gamma_3 \right\}, \end{aligned} \tag{15}$$

where $Q_{1,1}$ denotes the piecewise bilinear polynomial space with respect to the variables x and y . Let

$$V_h = V_h^1 \times V_h^2. \tag{16}$$

Obviously, V_h is a subspace of V .

Using the subspaces V_h and S_h instead of V and S in the variational Problem (6), we obtain the discrete problem: find $(u_h, p_h) \in V_h \times S_h$, such that

$$\begin{aligned} a(u_h, v_h) - b(v_h, p_h) &= 0 \quad \forall v_h \in V_h, \\ b(u_h, q_h) &= (\phi, q_h) \quad \forall q_h \in S_h. \end{aligned} \tag{17}$$

4. Convergence Analysis and Error Estimate

In this section, we give the corresponding convergence analysis and error estimate. Firstly, we define an interpolating for the following analysis.

For the quadrangulation τ_h , we divided the edges of all squares into two sets. The first one denoted by L_V contains all vertical edges, and the second one denoted by L_H contains all horizontal edges. We define the interpolation operator

$\Pi : V \rightarrow V_h$ by $\Pi u = (\Pi_h^1 u_1, \Pi_h^2 u_2) \in V_h^1 \times V_h^2$, which satisfy the following:

$$\begin{aligned} \int_l \Pi_h^1 u_1 ds &= \int_l u_1 ds \quad \forall l \in L_{V'}, \\ \int_l \Pi_h^2 u_2 ds &= \int_l u_2 ds \quad \forall l \in L_{H'}, \end{aligned} \quad (18)$$

where $L_{V'}$ is a set of edges of elements got by bisecting the most bottom element edges and the most top element edges of L_V and $L_{H'}$ are got by bisecting the most left element edges and the most right element edges of L_H . See Figures 2 and 3.

Lemma 3. For any $u \in V$, the interpolating $\Pi u \in V_h$ is uniquely determined by (18).

Proof. It is easy to see that (18) is equivalent to an equation of $AX = B$, where A is a matrix and X, B are vectors. Direct calculation shows that

$$A = h * \text{diag} \{A_1, A_1, \dots\}, \quad (19)$$

and the form of submatrix A_1 is as follows

$$\begin{pmatrix} \frac{1}{4} & \frac{1}{4} & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & 0 \\ 0 & \frac{3}{8} & \frac{1}{8} & 0 & 0 & \cdots & 0 & 0 & 0 & 0 \\ 0 & \frac{1}{8} & \frac{3}{4} & \frac{1}{8} & 0 & \cdots & 0 & 0 & 0 & 0 \\ 0 & 0 & \frac{1}{8} & \frac{3}{4} & \frac{1}{8} & \cdots & 0 & 0 & 0 & 0 \\ \cdots & \cdots \\ 0 & 0 & 0 & 0 & 0 & \cdots & \frac{1}{8} & \frac{3}{4} & \frac{1}{8} & 0 \\ 0 & 0 & 0 & 0 & 0 & \cdots & 0 & \frac{1}{8} & \frac{3}{8} & 0 \\ 0 & 0 & 0 & 0 & 0 & \cdots & 0 & 0 & \frac{1}{4} & \frac{1}{4} \end{pmatrix}. \quad (20)$$

We can see that the matrix is invertible and the equation is solvable, and therefore X can be uniquely determined. \square

Assume that the solution (u, p) of Problem (6) has the following smoothness properties:

$$u \in V' := V \cap H^2((\Omega)^2), \quad p \in S \cap H^1(\Omega). \quad (21)$$

Then, we should give the following lemma about the properties of the interpolations defined in (18).


Lemma 4. (i) There exist two constants C_3 and C_4 independent of h , such that

$$|u - \Pi u|_{i,2,\Omega} \leq C_3 h^{j-i} |u|_{j,2,\Omega}, \quad i = 0, 1, i \leq j \leq 2, \quad (22)$$

$$\inf_{q_h \in S_h} \|p - q_h\| \leq C_4 h |p|_{1,\Omega}. \quad (23)$$

(ii) There exists a constant C_5 independent of h such that

$$\|\Pi u\|_{H(\text{div},\Omega)} \leq C_5 \|u\|_{1,\Omega} \quad \forall u \in V. \quad (24)$$

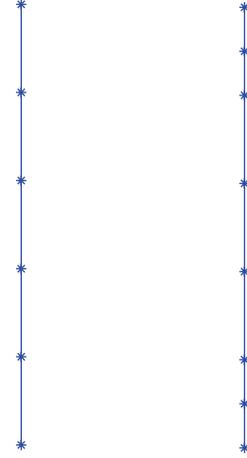

Some edges on L_V Corresponding edges on $L_{V'}$
(a) (b)

FIGURE 2: Some edges on L_V and corresponding edges on $L_{V'}$.

(iii) For any $u \in V$, we have that

$$\int_{\Omega} q_h \text{div} (u - \Pi u) dx = 0, \quad \forall q_h \in S_h. \quad (25)$$

Proof. The estimates (22), (23), and (24) follow from Definition (18) and the approximation theory; see [1], for example.

For (25), based on Green formulation, we know that

$$\begin{aligned} \int_{\Omega} q_h \text{div} (u - \Pi u) dx &= \sum_{T \in \tau_h} \int_T q_h \text{div} (u - \Pi u) dx \\ &= \sum_{T \in \tau_h} \int_{\partial T} q_h (u - \Pi u) \cdot \vec{n} ds \\ &\quad - \sum_{T \in \tau_h} \int_T \nabla q_h \cdot (u - \Pi u) dx \\ &= \sum_{l \in L_V} \int_l q_h (u_1 - \Pi_h^1 u_1) n_1 ds \\ &\quad + \sum_{l \in L_H} \int_l q_h (u_2 - \Pi_h^2 u_2) n_2 ds \\ &= \sum_{l \in L_{V'}} \int_l q_h (u_1 - \Pi_h^1 u_1) n_1 ds \\ &\quad + \sum_{l \in L_{H'}} \int_l q_h (u_2 - \Pi_h^2 u_2) n_2 ds \\ &= 0. \end{aligned} \quad (26)$$

Here, $\vec{n} = (n_1, n_2)$, and we use (18) for the last step. The proof is completed. \square



FIGURE 3: Some edges on L_H and corresponding edges on $L_{H'}$.

Theorem 5. *The discrete Inf-sup condition is valid; namely, there is a constant $\beta \geq 0$, such that*

$$\sup_{v_h \in V_h} \frac{b(v_h, q_h)}{\|v_h\|_{H(\text{div}, \Omega)}} \geq \beta \|q_h\|, \quad \forall q_h \in S_h. \quad (27)$$

Proof. From the process above, we obtain that $b(v, q_h) = b(\Pi v, q_h)$, any $v \in V, q_h \in S_h$. For any $p_h \in S_h$, there exists $v \in (H_0^1(\Omega))^2$, such that

$$\nabla \cdot v = q_h, \quad \|v\|_{1, \Omega} \leq C_6 \|q_h\|, \quad (28)$$

where C_6 is a constant independent of q_h ; then we obtain

$$\begin{aligned} \sup_{v_h \in V_h} \frac{b(v_h, q_h)}{\|v_h\|_{H(\text{div}, \Omega)}} &\geq \frac{b(\Pi v, q_h)}{\|\Pi v\|_{H(\text{div}, \Omega)}} \\ &= \frac{b(v, q_h)}{\|\Pi v\|_{H(\text{div}, \Omega)}} \\ &= \frac{\|q_h\|_0^2}{\|\Pi v\|_{H(\text{div}, \Omega)}}. \end{aligned} \quad (29)$$

Using Lemma 4, we have that

$$\sup_{v_h \in V_h} \frac{b(v_h, q_h)}{\|v_h\|_{H(\text{div}, \Omega)}} \geq \frac{1}{C_5} \frac{\|q_h\|_0^2}{\|v\|_{1, \Omega}} \geq \frac{1}{C_5 C_6} \|q_h\|. \quad (30)$$

Taking $\beta = 1/C_5 C_6$, we complete the proof of (27). \square

With the analysis technique presented by Arbogast and Wheeler [11], we consider the numerical analysis of the mixed finite element presented in this paper. Recall the RT_0 mixed element spaces $V_h' \times S_h'$ [3, 5, 6] based on the partition τ_h

$$V_h' = Q_{1,0}(\tau_h) \times Q_{0,1}(\tau_h), \quad S_h' = S_h. \quad (31)$$

Define the interpolation operator $\Pi' : V \rightarrow V_h'$ by the following equations:

$$\begin{aligned} \int_l \Pi' u_1 ds &= \int_l u_1 ds \quad \forall l \in L_V, \\ \int_l \Pi' u_2 ds &= \int_l u_2 ds \quad \forall l \in L_H. \end{aligned} \quad (32)$$

Denote by $P_S : S \rightarrow S_h$ the L^2 projection operator and by $P_{V'} : V \rightarrow V_h'$ the $(L^2(\Omega))^2$ vector projection operator. The following properties of the projections hold:

$$\begin{aligned} \|p - P_S p\|_0 &\leq Ch \|p\|_1 \\ \|u - P_{V'} u\|_0 &\leq Ch \|u\|_1. \end{aligned} \quad (33)$$

Then, we have an important property about the operator Π' .

Lemma 6. *For any $u \in Q_{1,1}(\tau_h^1) \times Q_{1,1}(\tau_h^2)$, there holds the equivalence $\Pi' u = P_{V'} u$; namely,*

$$(u - \Pi' u, v) = 0, \quad \forall v \in V_h'. \quad (34)$$

Proof. As the definition of V_h' is based on each element T , we focus our discussion on arbitrary element $e \subset \tau_h, e = [x_0, x_0 + h] \times [y_0, y_0 + h]$. Firstly, we consider the x -component (see Figure 4). The analysis for y -component is similar.

For a function $U_1 \in V_h^1$, on an element e , it is uniquely given by its node values $u_i, i = 1, \dots, 6$. As U_1 is a continuous bilinear function on each of the two parts as shown in Figure 4. Then, from (32), we know that $\Pi' u_1 = a + bx$ is given by

$$\begin{aligned} \int_{l_1} (a + bx) ds &= (a + bx_0) * h = (u_1 + 2u_3 + u_5) * \frac{h}{4} \\ \int_{l_2} (a + bx) ds &= (a + b(x_0 + h)) * h = (u_2 + 2u_4 + u_6) * \frac{h}{4}. \end{aligned} \quad (35)$$

We deduce that

$$a = \frac{u_1 + 2u_3 + u_5 - 4bx_0}{4}, \quad (36)$$

$$b = ((u_2 - u_1) + 2(u_4 - u_3) + (u_6 - u_5)) * \frac{1}{4h}.$$

It is clear that we just need to verify (34) for both $v = 1$ and $v = x$.

We first consider $v = 1$. Denote by φ_i the node basis function at the point i , which implies that $\varphi_i(x_j) = \delta_{i,j}$, which has the value 1 if and only if $i = j$; otherwise, it is zero. By direct calculation, we can get the basis, for example,

$$\varphi_1 = \frac{1}{4} \left(2 - \frac{2}{h}x + \frac{2}{h}x_0 \right) \left(2 - \frac{4}{h}y + \frac{4}{h}y_0 \right), \quad (37)$$

so

$$\begin{aligned} \int_e U_1 dx dy &= \int_{x_0}^{x_0+h} \int_{y_0}^{y_0+h} \frac{h}{2} (u_1 \varphi_1 + u_2 \varphi_2 + u_3 \varphi_3 + u_4 \varphi_4) dx dy \\ &\quad + \int_{x_0}^{x_0+h} \int_{y_0+h/2}^{y_0+h} (u_3 \varphi_3 + u_4 \varphi_4 + u_5 \varphi_5 + u_6 \varphi_6) dx dy \\ &= \frac{h^2}{8} (u_1 + u_2 + u_3 + u_4) + \frac{h^2}{8} (u_3 + u_4 + u_5 + u_6) \\ &= \frac{h^2}{8} (u_1 + u_2 + 2u_3 + 2u_4 + u_5 + u_6). \end{aligned} \quad (38)$$

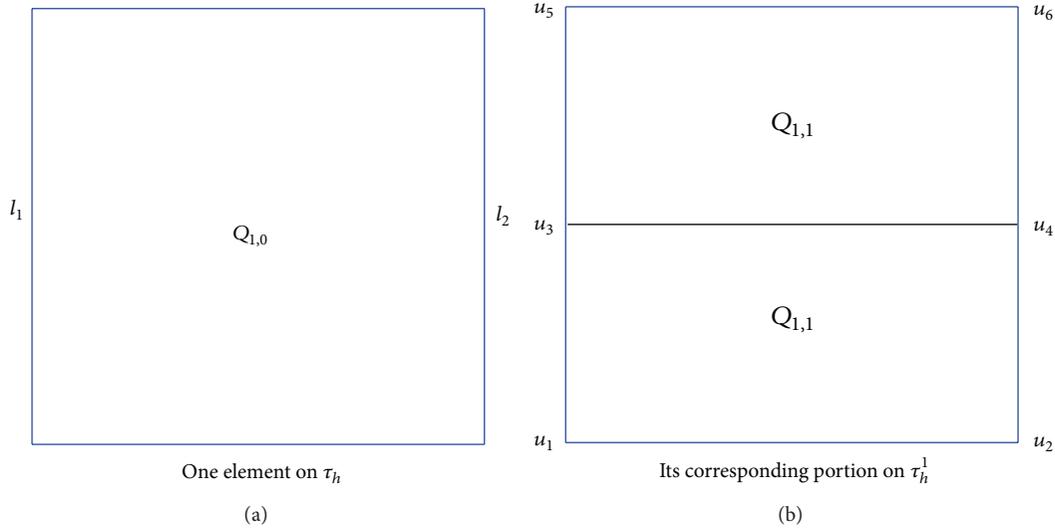


FIGURE 4: An element on τ_h and its corresponding portion on τ_h^1 .

By direct computation, we can easily see that $\int_e \Pi' U_1 dx dy$ has the same value, so

$$\int_e \Pi' U_1 dx dy = \int_e U_1 dx dy. \quad (39)$$

When $v = x$, we have that

$$\begin{aligned} \int_e \Pi' U_1 * x dx dy &= \int_{x_0}^{x_0+h} \int_{y_0}^{y_0+h} ax + bx^2 dx dy \\ &= a \left(x_0 h^2 + \frac{h^3}{2} \right) \\ &\quad + b \left(x_0^2 h^2 + x_0 h^3 + \frac{1}{3} h^4 \right), \end{aligned} \quad (40)$$

where a, b are defined in (36). Next, we compare the coefficients of u_i in (40) with the coefficients in $\int_e U_1 * x dx dy$,

$$\begin{aligned} \int_e \varphi_1 * x dx dy &= \int_{y_0}^{y_0+h/2} \int_{x_0}^{x_0+h} \varphi * x dx dy \\ &= \frac{h}{2} \int_{x_0}^{x_0+h} \frac{1}{4} \left(2x - \frac{2}{h} x^2 + \frac{2}{h} x_0 x \right) \\ &= \frac{1}{24} h^3 + \frac{1}{8} x_0 h^2 = k_1, \end{aligned} \quad (41)$$

which determine k_1 as the coefficient of u_1 . With similar computation, we obtain that

$$\begin{aligned} k_5 = k_1, \quad k_2 = k_6 &= \frac{x_0 h^2}{8} + \frac{h^3}{12}, \\ k_3 &= \frac{x_0 h^2}{4} + \frac{h^3}{12}, \quad k_4 = \frac{x_0 h^2}{4} + \frac{h^3}{6}. \end{aligned} \quad (42)$$

Comparing with (40), we can find that (34) is true with $v = x$. So, we certify the lemma. \square

Theorem 7. If (u, p) satisfy (6) and (u_h, p_h) satisfy (17), then there exists a positive constant C independent of h such that the following error estimates hold:

$$\|u - u_h\|_0 \leq Ch \|u\|_1, \quad (43)$$

$$\|p - p_h\|_0 \leq Ch (\|u\|_1 + \|p\|_1).$$

Proof. First, we focus on the error $u - u_h$. From (6), (17), (18), and (32), we derive that

$$b(u, q_h) = b(u_h, q_h) = b(\Pi u, q_h) = b(\Pi' u, q_h), \quad \forall q_h \in S_h. \quad (44)$$

Let $v = \Pi' v_h$ in (6); then

$$a(u, \Pi' v_h) - b(\Pi' v_h, p) = 0. \quad (45)$$

Namely,

$$a(P_v' u, v_h) - (P_s \nabla \cdot v_h, p) = a(P_v' u, v_h) - b(v_h, P_s p) = 0. \quad (46)$$

Here, we used the property $\nabla \cdot \Pi' v = P_s \nabla \cdot v$. Subtracting from (17), we get that

$$a(P_v' u - u_h, v_h) - b(v_h, P_s p - p_h) = 0. \quad (47)$$

Take

$$v_h = \Pi u - u_h, \quad q_h = P_s p - p_h. \quad (48)$$

Then

$$a(P_v' u - u_h, \Pi u - u_h) - b(\Pi u - u_h, P_s p - p_h) = 0. \quad (49)$$

Due to (44), we find that

$$b(\Pi u - u_h, P_s p - p_h) = 0. \quad (50)$$

Now, we analyze the error $u - u_h$ based on the equations above

$$\begin{aligned}
 a(u - u_h, u - u_h) &= a(u - u_h, u - \Pi u) + a(u - u_h, \Pi u - u_h) \\
 &= a(u - u_h, u - \Pi u) + a(u - P_{v'} u, \Pi u - u_h) \\
 &\quad + a(P_{v'} u - u_h, \Pi u - u_h) \\
 &\leq \epsilon_1 \|u - u_h\|_0^2 + \frac{1}{\epsilon_1} \|u - \Pi u\|_0^2 \\
 &\quad + \epsilon_2 \|\Pi u - u\|_0^2 + \frac{1}{\epsilon_2} \|u - P_{v'} u\|_0^2 \\
 &\quad + \epsilon_3 \|u - u_h\|_0^2 + \frac{1}{\epsilon_3} \|u - P_{v'} u\|_0^2,
 \end{aligned} \tag{51}$$

where $\epsilon_i > 0, i = 1, 2, 3$ are positive constants. Take the value of $\epsilon_1 = \epsilon_3 = \mu/4\kappa, \epsilon_2 = 1$, and combining with (22) and (33), we conclude that

$$\|u - u_h\|_0 \leq Ch \|u\|_1. \tag{52}$$

We also can obtain a higher order error estimate for $\|P_s p - p_h\|$. Consider the classical duality argument. Let ϕ be the solution of the following elliptical problem:

$$\Delta \phi = P_s p - p_h, \quad \frac{\partial \phi}{\partial n} = 0. \tag{53}$$

By the elliptic regularity, the estimate holds: $|\phi|_{H^2} \leq C \|P_s p - p_h\|_0$. So

$$\begin{aligned}
 \|P_s p - p_h\|_0^2 &= (P_s p - p_h, \nabla \cdot \nabla \phi) \\
 &= (P_s p - p_h, \nabla \cdot \Pi \nabla \phi) \\
 &= a(P_{v'} u - u_h, \Pi \nabla \phi) \\
 &= a(P_{v'} u - u_h, \Pi \nabla \phi - P_{v'} \nabla \phi) + a(P_{v'} u - u_h, P_{v'} \nabla \phi) \\
 &= a(P_{v'} u - u_h, \Pi \nabla \phi - P_{v'} \nabla \phi) + a(P_{v'} u - u, P_{v'} \nabla \phi) \\
 &\quad + a(u - u_h, P_{v'} \nabla \phi) \\
 &= a(P_{v'} u - u_h, \Pi \nabla \phi - P_{v'} \nabla \phi) + a(u - u_h, P_{v'} \nabla \phi - \nabla \phi) \\
 &\quad + a(u - u_h, \nabla \phi).
 \end{aligned} \tag{54}$$

Now, we estimate the right hand terms of the above inequality. From (33), (22), and (52), we have

$$\begin{aligned}
 a(P_{v'} u - u_h, \Pi \nabla \phi - P_{v'} \nabla \phi) &= a(P_{v'} u - u, \Pi \nabla \phi - \nabla \phi) \\
 &\quad + a(u - u_h, \Pi \nabla \phi - \nabla \phi) \\
 &\quad + a(P_{v'} u - u, \nabla \phi - P_{v'} \nabla \phi) \\
 &\quad + a(u - u_h, \nabla \phi - P_{v'} \nabla \phi) \\
 &\leq Ch^2 \|u\|_1 |\phi|_{H^2} \\
 &\leq Ch^2 \|u\|_1 \|P_s p - p_h\|_0.
 \end{aligned} \tag{55}$$

It is easy to see that

$$\begin{aligned}
 a(u - u_h, P_{v'} \nabla \phi - \nabla \phi) &\leq Ch^2 \|u\|_1 |\phi|_{H^2} \\
 &\leq Ch^2 \|u\|_1 \|P_s p - p_h\|_0,
 \end{aligned}$$

$$\begin{aligned}
 a(u - u_h, \nabla \phi) &= a(u - \Pi u, \nabla \phi) + a(\Pi u - u_h, \nabla \phi - P_{v'} \nabla \phi) \\
 &\quad + a(\Pi u - u_h, P_{v'} \nabla \phi) \\
 &\leq C (h^2 |u|_2 \|\phi\|_2 + h^2 |u|_1 \|\phi\|_2) \\
 &\leq Ch^2 \|u\|_2 \|P_s p - p_h\|_0.
 \end{aligned} \tag{56}$$

Here, we used the fact that $a(\Pi u - u_h, P_{v'} \nabla \phi) = 0$ which is got from the Green formulation and (44).

Combining the above inequalities, we conclude that

$$\begin{aligned}
 \|p - p_h\|_0 &\leq \|p - P_s p\|_0 + \|P_s p - p_h\|_0 \\
 &\leq Ch (\|u\|_1 + \|p\|_0).
 \end{aligned} \tag{57}$$

We complete the proof. \square

It is worth mentioning that we analyze this mixed finite element method in a direct way as it is not straightforward to apply the classical inf-sup theory. We just have the coercivity property for $a(u_h, v_h)$ on the normal L_2 space, not in the subspace of $v_{0h} = \{v_h \in V_h : b(v_h, q_h) = 0, \forall q_h \in S_h\}$, and the same issue also occurs in [11]. The problem is that testing $(\nabla \cdot v, w)$ by $w \in W_h$ does not control the full divergence of V , and it does not occur when this method is applied to Stokes or Navier-Stokes equations (as in [13, 14]). As a result, we just obtain a convergence rate of $\|u - u_h\|_0$. Failing to obtain convergence rate of $\|u - u_h\|_{H(\text{div}, \Omega)}$ is a weak point of this proposed mixed formulation compared to the classical Raviart-Thomas mixed method. But the significance of continuous flux applied to mass conservation can be found in Section 6.

5. Numerical Examples

In this section, we present some numerical results for the model Problem (1). For simplicity, we assume that the domain

TABLE 1: Three numerical test cases.

Case	Coefficient μ/κ	True solution u	True solution p
1	1	$\begin{pmatrix} x^2y - x^4y \\ xy^4 - xy^2 \end{pmatrix}$	$(x - 1/2)(y - 1/2)$
2	$\begin{pmatrix} e^{2xy^2} & 0 \\ 0 & \frac{1}{x+y} \end{pmatrix}$	$\begin{pmatrix} x^2y - x^4y \\ xy^4 - xy^2 \end{pmatrix}$	$(x - 1/2)(y - 1/2)$
3	$\begin{pmatrix} e^{2xy^2} & 0 \\ 0 & \frac{1}{x+y} \end{pmatrix}$	$\begin{pmatrix} e^{-xy} \\ x^2 \cos y \end{pmatrix}$	ye^x

is a unit square $\Omega = [0, 1] \times [0, 1]$ and the test cases are summarized in Table 1. We can choose the boundary conditions and the right hand terms according to the analytical solutions.

We compare our method to the formulation constructed by Arbogast and Wheeler [11]. Its corresponding discrete finite element spaces are

$$\begin{aligned} \bar{V}_h &= \left\{ v_h \in \left(C^{(0)}(\bar{\Omega}) \right)^2 : v_h|_T \in Q_{1,2}(T) \right. \\ &\quad \left. \times Q_{2,1}(T), \forall T \in \tau_h \right\}, \\ \bar{S}_h &= \left\{ q_h : q_h|_T = \text{constant}, \right. \\ &\quad \left. \forall T \in \tau_h; \int_{\Omega} q_h dx = 0 \right\}. \end{aligned} \quad (58)$$

The results of the error estimate with various norms are listed in Table 2, while the corresponding convergence rates of the presented method are shown in Table 3.

Close results of numerical errors for both formulations are shown in Table 2. From Table 3, we can see that p converges to p_h as $O(h)$ and $P_s p - p_h$ as $O(h^2)$ for our formulation, which both agree with the theorem. From the examples, we can observe that u_h converges to u somewhat better than expected, and it appears that on the uniform grid we attain $O(h^{3/2})$ superconvergence in the L^2 norm which is similar to the tests of Arbogast's formulation [11]. Yet, the degrees of freedom of our method are less than Arbogast's scheme. As in the case of $64 * 64$, the degrees of freedom of Arbogast's scheme are 20866 and 12676 for our formulation. The convergence rate of $\|u - u_h\|_{H(\text{div}, \Omega)}$ is first order, but here we cannot give the corresponding analysis.

6. A Valuable Application

In this section, we briefly show an application of the proposed mixed finite element method to the miscible displacement of one incompressible fluid by another in porous media. The model is as follows:

$$\begin{aligned} \mu(C) K^{-1} u + \nabla p &= \gamma(C) \nabla d, \quad (x, t) \in \Omega \times J, \\ \phi \frac{\partial C}{\partial t} + \nabla \cdot (uC) - \nabla \cdot (D(u) \nabla C) &= \bar{C}q, \quad (x, t) \in \Omega \times J, \\ \nabla \cdot u &= g, \quad (x, t) \in \Omega \times J, \\ u \cdot n &= g_1, \quad (x, t) \in \partial\Omega \times J, \\ C(x, 0) &= C_0(x), \quad x \in \Omega, \end{aligned} \quad (59)$$

where $\gamma(C)$ and d are the gravity coefficient and vertical coordinate, $\phi(x)$ is the porosity of the rock, and $\bar{C}q$ represents a known source. $D(x, u)$ is the molecular diffusion and mechanical dispersion coefficient. For convenience, we denote that $f = \bar{C}q$ and $a(C) = \mu(C)K^{-1}$. Let $\chi : (0, T] \rightarrow R^2$ be the solution of the ordinary differential equation

$$\begin{aligned} \frac{d\chi}{d\tau} &= \frac{\mathbf{u}(\chi(x, t; \tau), \tau)}{\phi(x)}, \\ \chi(x, t; t) &= x. \end{aligned} \quad (60)$$

Let $V = H(\text{div}, \Omega)$, $S = L^2_0(\Omega)$, $M = H^1(\Omega)$; then, we derive the entire weak formulation for the model: find $(\mathbf{u}, p, C) \in V \times S \times M$, such that

$$\begin{aligned} (a(C)u, v) - (p, \nabla \cdot v) &= (\gamma(C) \nabla d, \mathbf{v}), \quad \forall \mathbf{v} \in V, \\ \left(\phi(x) \frac{dC(\chi, \tau)}{d\tau} + gC, w \right) + (D \nabla C, \nabla w) &= (f, w), \\ \forall w \in M, \end{aligned} \quad (61)$$

$$(\nabla \cdot u, \varphi) = (g, \varphi), \quad \forall \varphi \in S.$$

Let Δt be the time step for both concentration and pressure; define

$$M_h = \left\{ v_h \in C^{(0)}(\bar{\Omega}) : v_h|_T \in Q_{1,1}(T), \forall T \in \tau_h \right\}. \quad (62)$$

Combing with the new characteristic finite element method which preserves the mass balance proposed by Rui and Tabata [10], the approximate characteristic line of χ is defined as

$$\chi^n(x) = x - \frac{u_h^n}{\phi(x)} \Delta t. \quad (63)$$

We obtain the corresponding full-discrete mass-conservative characteristic (MCC) scheme: find $(u_h, p_h, C_h) \in V_h \times S_h \times M_h$, such that

$$\begin{aligned} (a(C_h^n) u_h^n, v_h) - (p_h, \nabla \cdot v_h) &= (\gamma(C_h^n) \nabla d, v_h), \quad \forall v_h \in V_h \\ \left(\frac{\phi C_h^n - (\phi C_h^{n-1}) \circ \chi^n \gamma^n}{\Delta t}, \varphi_h \right) + (D(u_h^n) \nabla C_h^n, \nabla \varphi_h) &= (f, \varphi_h), \quad \forall \varphi_h \in M_h \\ (\nabla \cdot u_h^n, q_h) &= (g, q_h), \quad \forall q_h \in S_h \\ C_h^0 &= \bar{C}^0, \end{aligned} \quad (64)$$

where

$$\begin{aligned} \gamma^n &= \det \left(\frac{\partial \chi^n}{\partial x} \right) \\ &= 1 - \frac{\nabla \cdot u_h^n}{\phi} \Delta t + u_h^n \frac{\nabla \phi}{\phi^2} \Delta t \\ &\quad + \nabla \left(\frac{u_{h,1}^n}{\phi} \right) \cdot \text{curl} \left(\frac{u_{h,2}^n}{\phi} \right) \Delta t^2. \end{aligned} \quad (65)$$

TABLE 2: The numerical error for fm. 1 (our formulation) and fm. 2 (Arbogast’s formulation).

Case	Mesh	$\ u - u_h\ $		$\ \nabla \cdot (u - u_h)\ $		$\ p - p_h\ $		$\ P_s p - p_h\ $	
		fm. 1	fm. 2	fm. 1	fm. 2	fm. 1	fm. 2	fm. 1	fm. 2
1	4	$4.90e-2$	$5.67e-2$	$3.06e-1$	$3.24e-1$	$2.93e-2$	$2.93e-2$	$4.53e-3$	$4.17e-3$
	8	$1.78e-2$	$2.05e-2$	$1.53e-1$	$1.62e-1$	$1.47e-2$	$1.47e-2$	$1.24e-3$	$1.20e-3$
	16	$6.45e-3$	$7.37e-3$	$7.67e-2$	$8.13e-2$	$7.37e-3$	$7.37e-3$	$3.18e-4$	$3.15e-4$
	32	$2.31e-3$	$2.64e-3$	$3.84e-2$	$4.07e-2$	$3.68e-3$	$3.68e-3$	$8.01e-5$	$7.98e-5$
	64	$8.25e-4$	$9.38e-4$	$1.92e-2$	$2.03e-2$	$1.84e-3$	$1.84e-3$	$2.01e-5$	$2.01e-5$
2	4	$4.70e-2$	$5.47e-2$	$2.99e-1$	$3.22e-1$	$2.95e-2$	$2.94e-2$	$5.42e-3$	$4.97e-3$
	8	$1.72e-2$	$1.99e-2$	$1.53e-1$	$1.63e-1$	$1.47e-2$	$1.47e-2$	$1.54e-3$	$1.48e-3$
	16	$6.25e-3$	$7.19e-3$	$7.75e-2$	$8.27e-2$	$7.37e-3$	$7.37e-3$	$4.04e-4$	$3.98e-4$
	32	$2.25e-3$	$2.58e-3$	$3.89e-2$	$4.15e-2$	$3.68e-3$	$3.68e-3$	$1.03e-4$	$1.02e-4$
	64	$8.08e-4$	$9.21e-4$	$1.95e-2$	$2.08e-2$	$1.84e-3$	$1.84e-3$	$2.59e-5$	$2.58e-5$
3	4	$9.65e-2$	$1.09e-1$	$4.14e-1$	$4.67e-1$	$1.49e-1$	$1.49e-1$	$7.39e-3$	$6.21e-3$
	8	$3.79e-2$	$4.31e-2$	$2.16e-1$	$2.46e-1$	$7.44e-2$	$7.44e-2$	$2.14e-3$	$1.89e-3$
	16	$1.42e-2$	$1.62e-2$	$1.11e-1$	$1.28e-1$	$3.72e-2$	$3.72e-2$	$5.72e-4$	$5.19e-4$
	32	$5.19e-3$	$5.91e-3$	$5.63e-2$	$6.51e-2$	$1.86e-2$	$1.86e-2$	$1.47e-4$	$1.35e-4$
	64	$1.87e-3$	$2.13e-3$	$2.84e-2$	$3.28e-2$	$9.31e-3$	$9.31e-3$	$3.72e-5$	$3.44e-5$

TABLE 3: The corresponding convergence rates of fm. 1 and fm. 2.

Case	Mesh	$\ u - u_h\ $		$\ \nabla \cdot (u - u_h)\ $		$\ p - p_h\ $		$\ P_s p - p_h\ $	
		fm. 1	fm. 2	fm. 1	fm. 2	fm. 1	fm. 2	fm. 1	fm. 2
1	8	1.459	1.468	0.997	1.001	0.995	0.993	1.875	1.795
	16	1.468	1.476	0.998	0.995	0.999	0.999	1.961	1.934
	32	1.479	1.484	1.000	0.998	1.000	1.000	1.987	1.978
	64	1.486	1.489	1.000	1.000	1.000	1.000	1.996	1.993
2	8	1.449	1.457	0.968	0.978	0.999	0.996	1.817	1.742
	16	1.462	1.471	0.983	0.984	1.001	1.001	1.930	1.901
	32	1.471	1.479	0.993	0.993	1.001	1.000	1.976	1.960
	64	1.480	1.485	0.997	0.997	1.000	1.000	1.989	1.984
3	8	1.347	1.340	0.942	0.924	0.998	0.997	1.787	1.708
	16	1.416	1.414	0.957	0.945	0.999	0.999	1.906	1.870
	32	1.452	1.452	0.979	0.973	1.000	1.000	1.959	1.942
	64	1.472	1.473	0.990	0.986	1.000	1.000	1.983	1.975

We can see that the continuous flux is indispensable for γ^n . Let $\varphi_h = 1$ in (64), and summing it up from $n = 1$ to N , we get the mass balance

$$\int_{\Omega} \phi C_h^N dx = \int_{\Omega} \phi C_h^0 dx + \Delta t \sum_{n=1}^N \int_{\Omega} f^n dx. \quad (66)$$

Here, we just give numerical example to show the feasibility of this application, and the theoretical analysis of stability, mass balance, and convergence of this discrete scheme will be discussed in the future. Firstly, we define compute mass error and relative mass error as follows:

$$\begin{aligned} \text{compute mass error} &: \int_{\Omega} \phi C_h^N dx \\ &\quad - \left(\int_{\Omega} \phi C_h^0 dx + \Delta t \sum_{n=1}^N \int_{\Omega} f^n dx \right), \\ \text{relative mass error} &: \frac{\int_{\Omega} \phi C_h^N dx - \int_{\Omega} \phi C_h^0 dx}{\int_{\Omega} \phi C_h^N dx}. \end{aligned} \quad (67)$$

Now, we select $\mu(C) = C$, and the following analytical solution of the problem is

$$\begin{aligned} u(x, y, t) &= (e^x + t, e^y + t), \\ p(x, y, t) &= e^{-t} (x^2 + y^2), \\ C(x, y, t) &= e^{-t} \left(\left(x - \frac{1}{2}\right)^2 + \left(y - \frac{1}{2}\right)^2 \right). \end{aligned} \quad (68)$$

The error results with different norms of this numerical simulation can be listed in Tables 4 and 5, and at last we give a mass error to check the mass conservation in Table 6.

As can be seen from Tables 4 and 5, we conjecture that almost all the convergence rates are true in general. From Table 6 we find that mass balance is right as computational mass error resulting from computer is inevitable and nearly invariable for different meshes, while the relative mass error decreases as was expected. The corresponding theoretical analysis about this system will be considered in the future work.

TABLE 4: Numerical error and convergence rate ($\Delta t = Ch$).

Mesh	5 × 5		10 × 10		20 × 20		40 × 40	
	Error	Rate	Error	Rate	Error	Rate	Error	Rate
$\ u\ _{l^2(L^2)}$	1.83e − 4	—	7.10e − 5	1.36	3.38e − 5	1.07	1.65e − 5	1.03
$\ u\ _{l^\infty(L^2)}$	1.29e − 2	—	5.19e − 3	1.31	2.64e − 3	0.97	1.37e − 3	0.95
$\ p\ _{l^2(L^2)}$	1.33e − 3	—	6.67e − 4	1.00	3.33e − 4	1.00	1.67e − 4	1.00
$\ p\ _{l^\infty(L^2)}$	9.43e − 2	—	4.71e − 2	1.00	2.35e − 2	1.00	1.18e − 2	1.00
$\ C\ _{l^2(H^1)}$	2.32e − 3	—	1.16e − 3	1.01	5.78e − 4	1.00	2.88e − 4	1.00
$\ C\ _{l^\infty(H^1)}$	1.63e − 1	—	8.18e − 2	1.00	4.11e − 2	0.99	2.05e − 2	0.99

TABLE 5: Numerical error and convergence rate ($\Delta t = Ch^2$).

Mesh	5 × 5		10 × 10		20 × 20		40 × 40	
	Error	Rate	Error	Rate	Error	Rate	Error	Rate
$\ C\ _{l^2(L^2)}$	8.48e − 5	—	2.13e − 5	1.995	5.37e − 6	1.986	1.36e − 6	1.971
$\ C\ _{l^\infty(L^2)}$	1.34e − 2	—	3.37e − 3	1.989	8.56e − 4	1.978	2.21e − 4	1.952

TABLE 6: Mass error for concentration C ($\Delta t = Ch$).

Mesh	5 × 5	10 × 10	20 × 20	40 × 40
Compute mass error	1.209e − 3	1.243e − 3	1.269e − 3	1.284e − 3
Relative mass error	2.068e − 2	5.427e − 3	1.487e − 3	4.371e − 4

Acknowledgment

The work is supported by the National Natural Science Foundation of China Grant no. 11171190.

References

- [1] P. G. Ciarlet, *The Finite Element Method for Elliptic Problems*, North-Holland, Amsterdam, The Netherlands, 1977.
- [2] V. Girault and P.-A. Raviart, *Finite Element Approximations of the Navier-Stokes Equations*, vol. 749, Springer, New York, NY, USA, 1979.
- [3] F. Brezzi, J. Douglas, Jr., R. Durán, and M. Fortin, “Mixed finite elements for second order elliptic problems in three variables,” *Numerische Mathematik*, vol. 51, no. 2, pp. 237–250, 1987.
- [4] F. Brezzi, J. Douglas, M. Fortin, and L. D. Marini, “Efficient rectangular mixed finite elements in two and three space variables,” *Mathematical Modelling and Numerical Analysis*, vol. 21, no. 4, pp. 581–604, 1987.
- [5] F. Brezzi and M. Fortin, *Mixed and Hybrid Finite Element Methods*, vol. 15 of *Springer Series in Computational Mathematics*, Springer, New York, NY, USA, 1991.
- [6] P.-A. Raviart and J. M. Thomas, “A mixed finite element method for 2nd order elliptic problems,” in *Mathematical Aspects of the FEM*, vol. 606 of *Lecture Notes in Mathematics*, pp. 292–315, Springer, 1977.
- [7] M. R. Correa and A. F. D. Loula, “Unconditionally stable mixed finite element methods for Darcy flow,” *Computer Methods in Applied Mechanics and Engineering*, vol. 197, no. 17-18, pp. 1525–1540, 2008.
- [8] A. Masud and T. J. R. Hughes, “A stabilized mixed finite element method for Darcy flow,” *Computer Methods in Applied Mechanics and Engineering*, vol. 191, no. 39-40, pp. 4341–4370, 2002.
- [9] J. Bear, *Dynamics of Fluids in Porous Media*, Dover, New York, NY, USA, 1972.
- [10] H. Rui and M. Tabata, “A mass-conservative characteristic finite element scheme for convection-diffusion problems,” *Journal of Scientific Computing*, vol. 43, no. 3, pp. 416–432, 2010.
- [11] T. Arbogast and M. F. Wheeler, “A family of rectangular mixed elements with a continuous flux for second order elliptic problems,” *SIAM Journal on Numerical Analysis*, vol. 42, no. 5, pp. 1914–1931, 2005.
- [12] H. D. Han, “An economical finite element scheme for Navier-Stokes equations,” *Journal of Computational Mathematics*, vol. 5, no. 2, pp. 135–143, 1987.
- [13] H. Han and X. Wu, “A new mixed finite element formulation and the MAC method for the Stokes equations,” *SIAM Journal on Numerical Analysis*, vol. 35, no. 2, pp. 560–571, 1998.
- [14] H. Han and M. Yan, “A mixed finite element method on a staggered mesh for Navier-Stokes equations,” *Journal of Computational Mathematics*, vol. 26, no. 6, pp. 816–824, 2008.
- [15] I. Babuška, “Error-bounds for finite element method,” *Numerische Mathematik*, vol. 16, pp. 322–333, 1971.
- [16] F. Brezzi, “On the existence, uniqueness and approximation of saddle-point problems arising from Lagrangian multipliers,” vol. 8, no. 2, pp. 129–151, 1974.